


MEASURING AND ORDERING ALUMINUM SQUARE DOORS

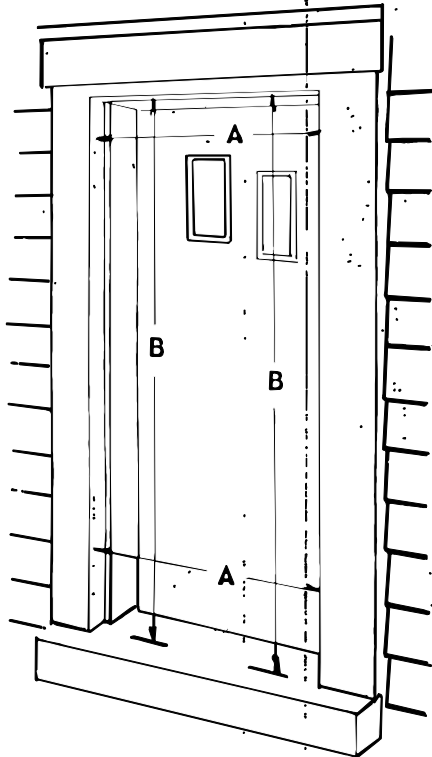

SQUARE

MEASURING INSTRUCTIONS FOR SQUARE DOORS

- A FULL WIDTH, CASING TO CASING, SMALLEST DIMENSION
- B FULL HEIGHT, SILL TO CASING, SMALLEST DIMENSION
- C HINGE SIDE MUST BE NOTED ON PRE HUNG DOORS. HINGE SIDE IS DETERMINED BY FACING DOOR FROM OUTSIDE AND NOTING LEFT OR RIGHT SIDE HINGE. LOCK IS PLACED 42" FROM BOTTOM OF DOOR. NOTE DIFFERENT LOCK HEIGHT IF STORM DOOR LOCK WILL HIT PRIME DOOR LOCK. TO DETERMINE DOOR SIZE, IT IS SUGGESTED THAT A MINIMUM CLEARANCE OF 1/2" BE DEDUCTED FROM WIDTH AND HEIGHT

When ordering: WIDTH is given as FIRST dimension, HEIGHT as second.

Dimensions are always given in inches.

You are RESPONSIBLE FOR PHONE ORDERS.

Avoid errors, use this order form.

Via mail or our 24 hour fax line.

NOTE: DOOR SIZES AND MODELS SHOWN, EXCEPT WHERE NOTED, WILL BE FABRICATED AND GLAZED WITH TEMPERED GLASS. ALL OTHERS WILL BE GLAZED WITH ACRYLIC PLASTIC. THERE WILL BE TIMES WHEN WE ARE TEMPORARILY OUT OF SIZES ON TEMPERED GLASS. WHEN THIS OCCURS, WE RESERVE THE RIGHT TO SUPPLY ACRYLIC, WITH NO EXCHANGES WHEN TEMPERED GLASS BECOMES AVAILABLE AGAIN. CUSTOM TEMPERED GLASS CAN BE SPECIALLY ORDERED AT ADDITIONAL CHARGE TO YOU.

GENERAL BUSINESS LAW PERTAINING TO SAFETY GLAZING, BRIEFLY THE LAW STATES UNDER 389M ARTICLE 25B THAT ALL GLASS ENTRANCE DOORS WHETHER TO RESIDENTIAL, COMMERCIAL, INDUSTRIAL, OR PUBLIC BUILDINGS, AND THOSE FIXED GLAZED PANELS IMMEDIATELY ADJACENT TO AND ABOVE ENTRANCE DOORS MUST BE SAFETY GLAZED.